


DaySequerra

M4 HD

AM-FM Digital Radio Receiver

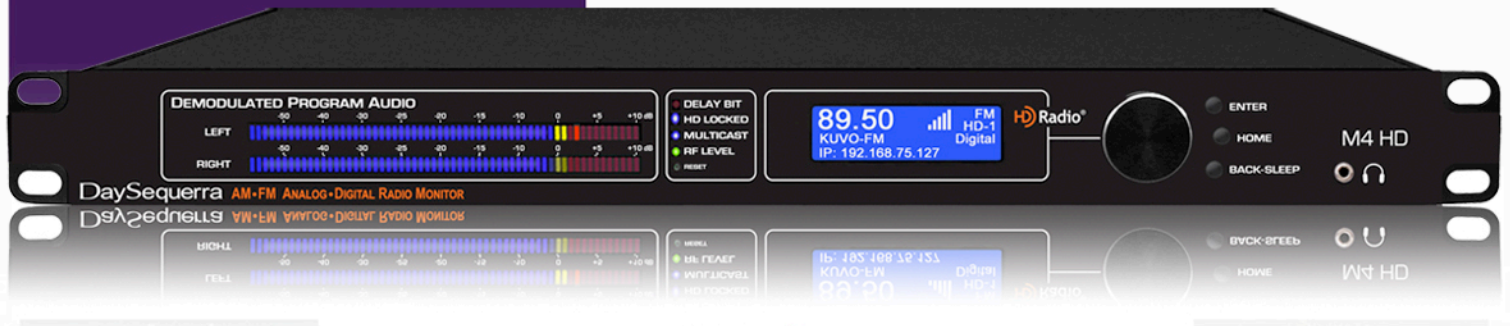


M4 HD Broadcast Receiver

Introducing the M4 HD. DaySequerra's new M4 HD is the most powerful analog AM/FM and HD Radio® AM/FM tuner available today, and it's an incredibly cost-effective solution.

- **Stays Locked** – Proprietary StreamLock technology make sure the M4 HD stays locked to the stream you've selected - AM-FM analog, AM-FM HD Radio MPS or HD-1 through HD-8, even if the broadcast or your AC power is interrupted; **does not automatically revert to analog!**
- **Analog AM-FM plus HD Radio** – Complete monitoring of HD Radio AM/FM broadcasts including FM multicast channels HD-2 through HD-8: user-selectable tuning steps and analog FM 50/75 μ Sec de-emphasis.
- **Time-Alignment** – Monitor your HD Radio HD-1/MPS diversity delay using the built-in Split-Mode feature.
- **Bright graphic LCD** – provides front panel display of all RBDS and HD Radio PAD/SIS, along with network and alarm conditions; audio level, digital audio quality and carrier quality indications.
- **Artist Experience** – monitor your broadcast's album art, station logo and advertiser branding.
- **Email Alerts** – Get an email alert direct from your M4 HD TimeLock for loss of TimeLock, Program Audio, Carrier, or OFDM HD Radio Lock; 5 rear panel alarm tallies.
- **Built-in Webserver** – [Remote Webserver](#) for remote control and logging using any browser on your Ethernet network; 15 presets per band; remote Flash upgrades; password protected access.
- **Powerful Audio Outputs** – XLR balanced analog outputs +4 dBm @ 100% modulation; high-performance headphone monitor delivering greater than 1W into 8-ohm
- **Front Panel Lockout** – Prevents unauthorized settings changes.
- **Optional TimeLock™** – Upgrade your M4 HD to measure HD Radio Diversity Delay time alignment of the HD Radio MPS and HD-1 audio streams with accuracy to one audio sample, includes TimeLock rear panel alarm tally and email alert.

Call +856-719-9900 and schedule your free M4 HD demo today!

M4 HD: Powerful Remote

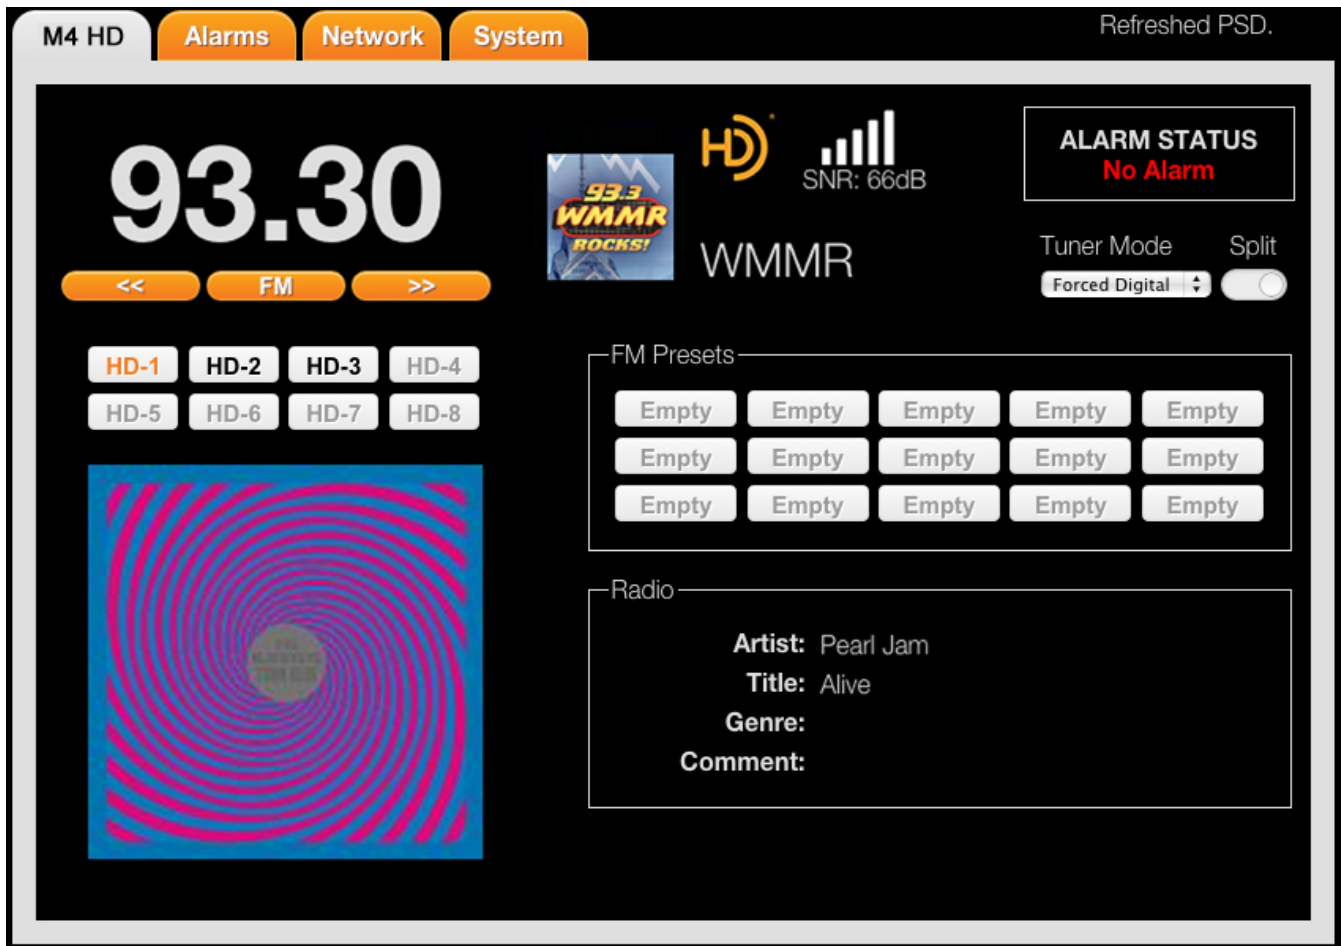

Upgrade your M4.OX or M4.2R to M4 HD

Factory-Direct - Limited Time Offer

The DaySequerra **Factory-Direct Upgrade Program** lets you upgrade any DaySequerra M4.OX or M4.2R to add the latest features and benefits of the M4 HD.

■ Factory-Direct Upgrade program and pricing is **available to End-Users only**

■ Includes new **3-year Warranty** effective from upgrade date

Email sales@daysequerra.com to schedule your upgrade!

M4 HD

AM-FM Digital Radio Receiver

- ✓ Stays locked to Multicast
- ✓ Remote Control and Reset
- ✓ Internal Email - no PC required



Rear panel alarm tallies for loss of Audio, Carrier, OFDM HD Radio Lock, Multicast Available and PAD-RBDS Error/Loss

TECHNICAL SPECIFICATIONS

RF TUNING RANGE

AM: 520 kHz to 1720 kHz [User-selected 9 kHz or 10 kHz increments]
FM: 87.9 MHz to 108.1 MHz [User-selected 100 kHz or 200 kHz increments]

RF USABLE SENSITIVITY

AM: < 20 dBf [-100 dBm] for SNR -20 dB referenced to 30% modulation
FM: < 15 dBf [-100 dBm] for SNR -30 dB referenced to 100% modulation

RF INPUT

F-Type 75-ohm connectors
AM-FM: -55 dBm Nominal; -20 dBm Maximum

IF REJECTION

AM: > 100 dB for SNR -20 dB
FM: > 100 dB for SNR -30 dB

AF BANDWIDTH

AM: ± 1 dB, 40 Hz to 15 kHz
FM: ± 1 dB, 20 Hz to 20 kHz

FM DE-EMPHASIS

50 μ SEC or 75 μ SEC [User-selected]

ANALOG AUDIO OUTPUTS

Left/Right Balanced XLR connectors
+4 dBm into 600 ohm at 100% modulation

DIGITAL AUDIO OUTPUT

AES-3 Professional, 110-ohm transformer-isolated on XLR connector
0 dBFS < 0.005% THD+N using HD Radio™ input

HD RADIO™ HYBRID ACQUISITION

< 4.5 seconds

HD RADIO™ SPLIT-MODE

MPS Left [on R output] and HD-1 Left [on L output] on Analog, Digital and Headphone audio outputs

ALARM NOTIFICATION

5-rear panel tallies, front panel indications and email for loss of Audio, Carrier, OFDM HD Radio Lock, Multicast Available and PAD-RBDS

RBDS DATA

PI [Call Letters], PS [Program Service], PTY [Program Type], and RT [Radio Text]

HD RADIO™ PAD AND SIS DATA

SIG, SIS, Extended SIS, AAAS, and LOT; PAD including station long and short name, program type, song file, artist, album, genre and comment fields; Artist Experience - album art, station logo and advertiser branding

AC POWER

Auto-sensing 85-264 VAC, 47-63 Hz input

ENVIRONMENTAL

Operating Temperature: +41 to +105° F [+5 to +40° C]
Storage Temperature: -13 to +140° F [-25 to +60° C]
Relative Humidity: Maximum 85%, non-condensing

DIMENSIONS

1RU EMI-hardened; 19" [482 mm] W x 14" [3.5M] D x 1.75" [44] H

SHIPPING WEIGHT

12 lbs. [5.4 kg]

WARRANTY

Three years, limited parts and labor

M4 HD RCA OPTION

Unbalanced analog and digital audio outputs on RCA connectors installed in place of standard XLR connectors; order model **M4 HD-RCA**

DTS, DTS-HD, the Symbol, & DTS or DTS-HD and the Symbol together are registered trademarks of DTS, Inc. © DTS, Inc. All Rights Reserved. HD Radio Technology manufactured under license from iBiquity Digital Corporation. U.S. and Foreign Patents. HD Radio™ and the HD, HD Radio, and "Arc" logos are proprietary trademarks of iBiquity Digital Corp

*Email Server not compatible with SSL encryption
Features and specifications are subject to change without notice.

DaySequerra

www.daysequerra.com